

PRELIMINARY EARTHWORK QUANTITY TAKEOFF

Project: Red Oak Development | **Client:** Steve's Excavating | **Date:** 08/31/2026 | **Rev:** 0
Grounded Measures LLC | **Phone:** (724) 221-7521 | **Email:** Bids@GroundedMeasures.com

Source Files Relied Upon: Pennsylvania Spatial Data Access (PASDA) 2019 QL2 LiDAR DEM (Allegheny County) and provided architect plans.

IMPORTANT NOTICE:

This document is an earthwork takeoff estimate prepared for budgeting and bidding purposes only. This document is not an engineering document, survey, certification, grading plan, or construction document. No engineering, surveying, or design services were performed. No other documents or site information were relied upon unless specifically identified above. Quantities are based solely upon the information available to the preparer as of the date identified above. Subsequent revisions to plans, site conditions, or project requirements are outside the scope of this estimate.

EARTHWORK SUMMARY

GROUND ED MEASURES LLC	Cut Factor	Fill Factor	2D Area (SF)	2D Area (Acres)	Cut Volume (CY)	Fill Volume (CY)	Net Volume (CY)
Red Oak Development Grading	1.00	1.00	328,710.35	7.546	30,003.00	175,961.90	-145958.9 FILL
TOTALS	—	—	328,710.35	7.546	30,003.00	175,961.90	-145958.9 FILL
6" Topsoil Removal (ON 90% OF CUT AREA)	1.15	1.00	86,777.97	1.992	1,848.05	0.00	1848.049425 CUT
TOTALS	—	—	86,777.97	1.992	1,848.05	0.00	1848.049425 CUT


Model Assumptions:

A uniform 6-inch topsoil stripping depth across 90% of the Limit of Disturbance areas in cut.

No compaction, shrink, or swell factors have been applied to the raw development grading, however a 1.15 cut factor was applied to the topsoil removal quantity.

Existing Ground Surface: Because no CAD files or field-verified topographic surveys were provided, the existing ground surface was generated using publicly available GIS LiDAR data and has not been independently field verified.

Finished Ground Surface (FGS): FGS is a client-provided/project-document input and has not been independently established, reviewed, or certified by the preparer.

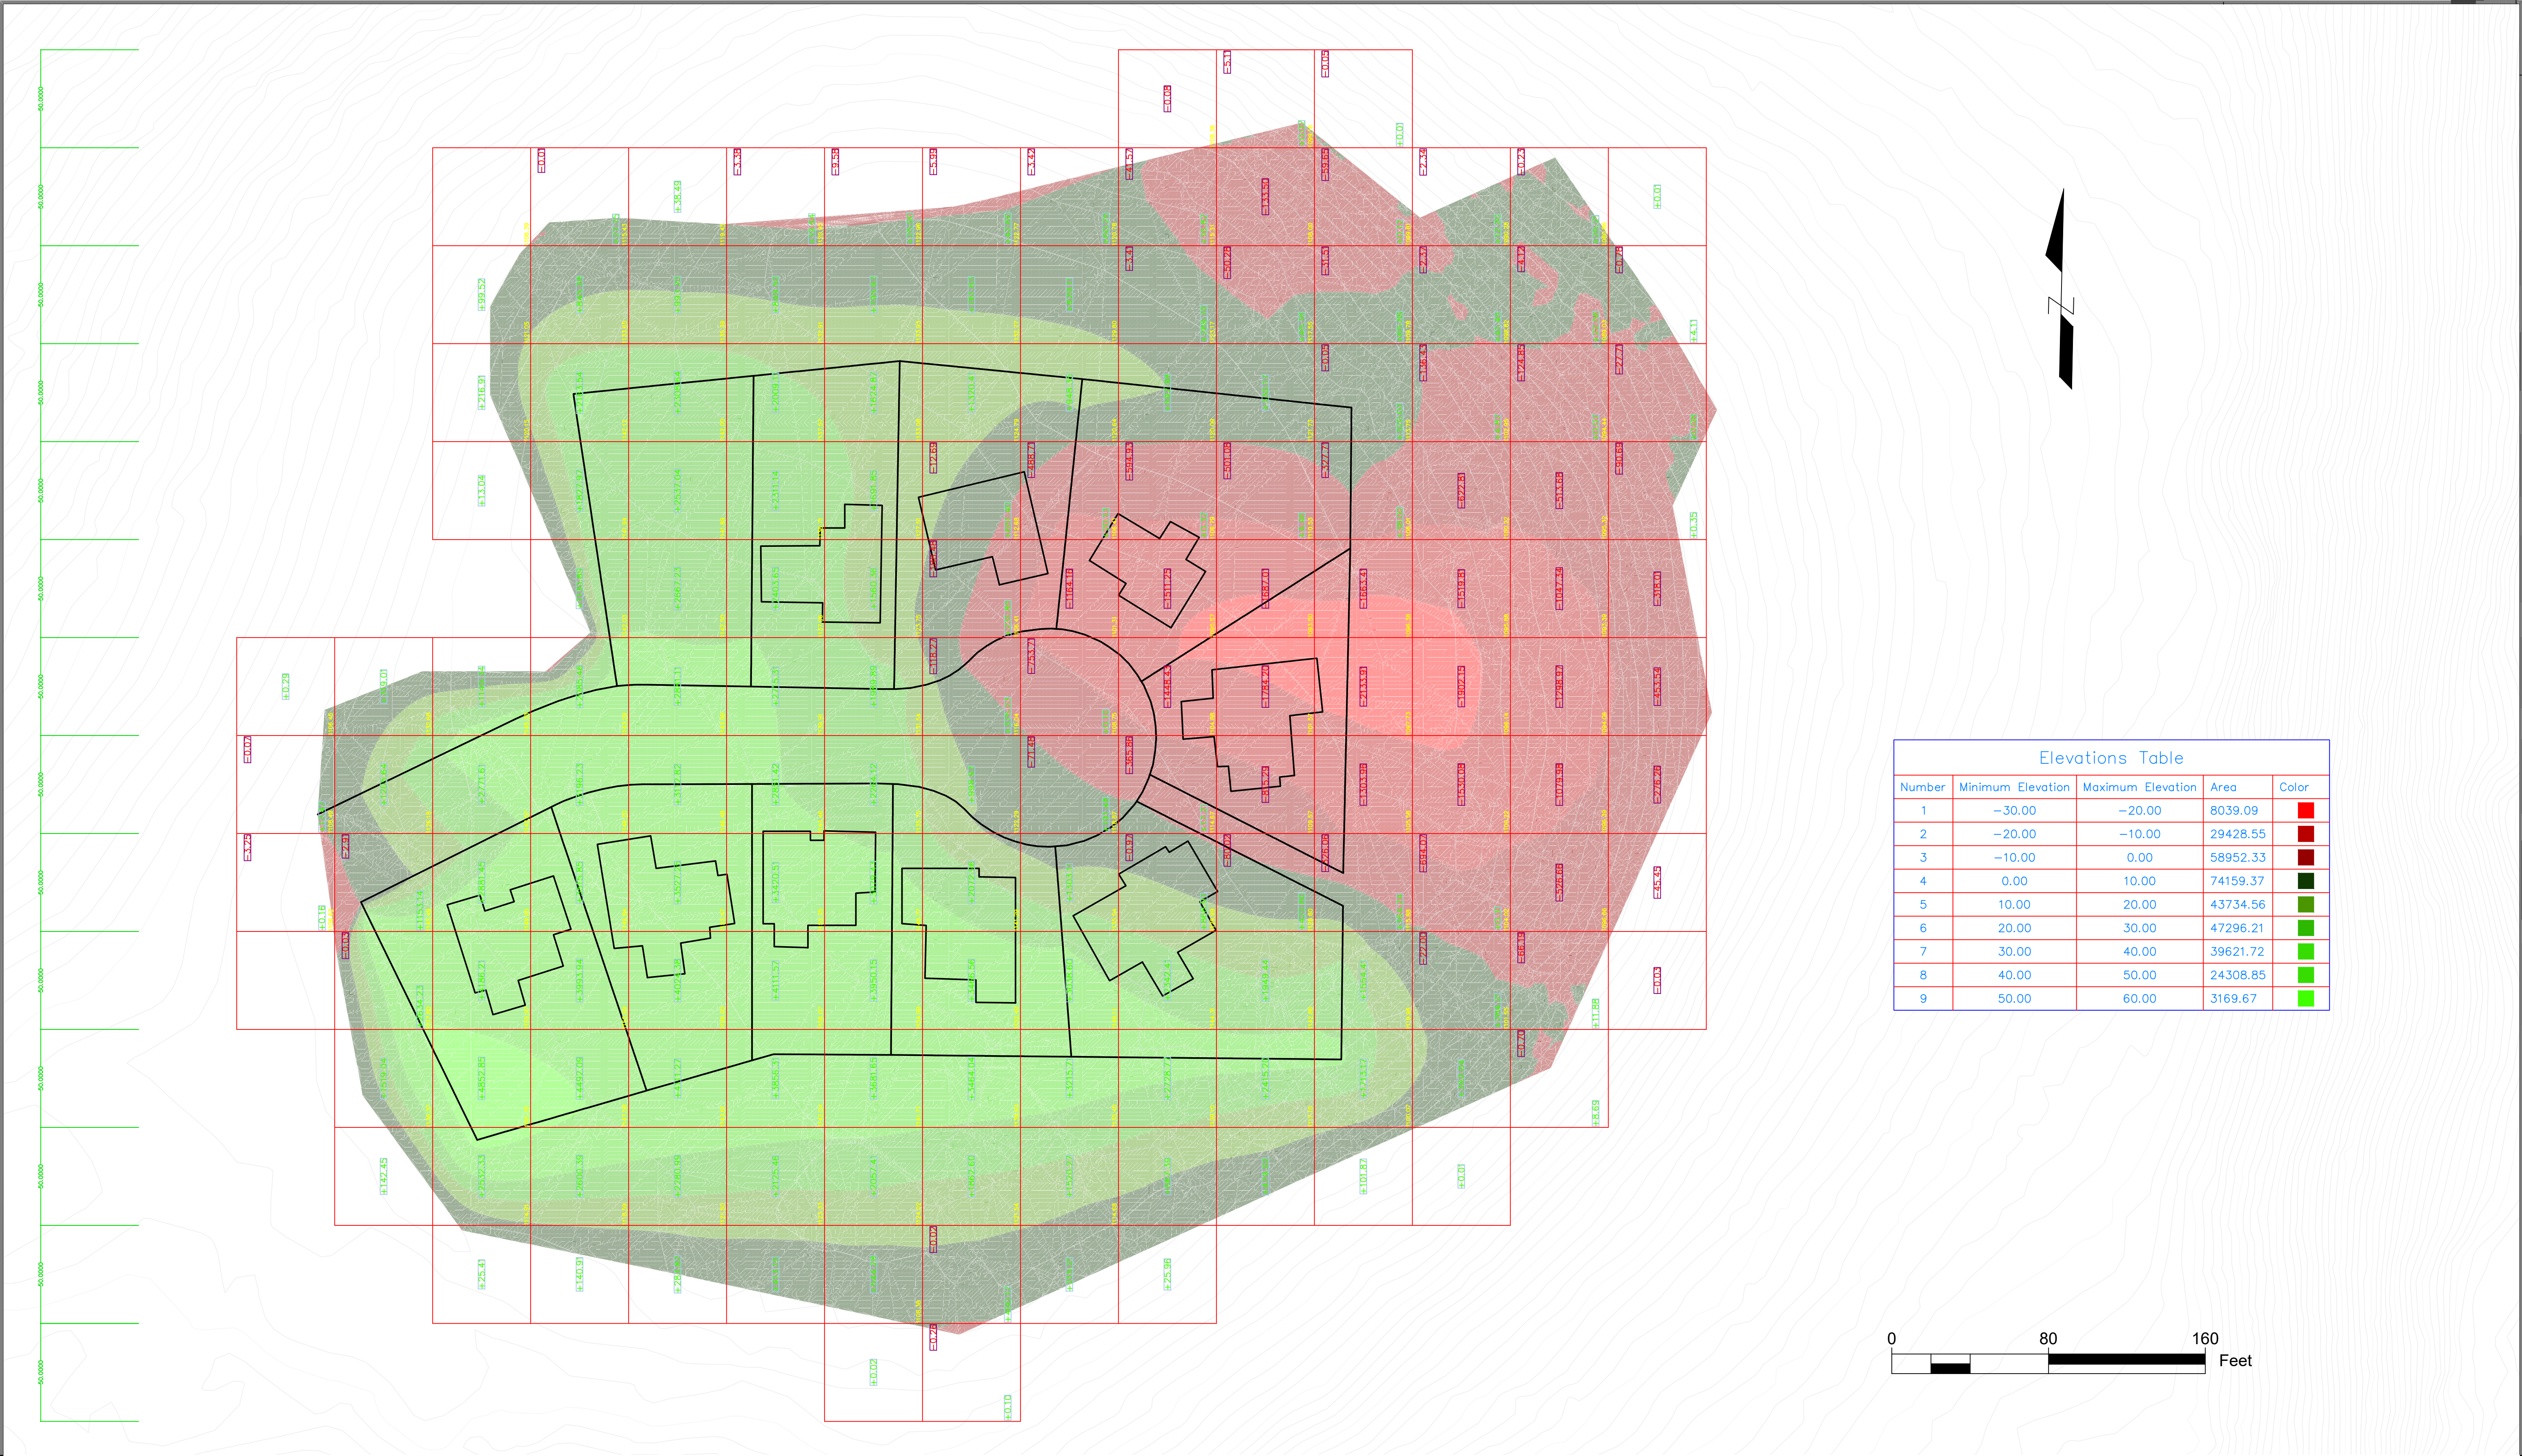

Elevations Table				
Number	Minimum Elevation	Maximum Elevation	Area	Color
1	-30.00	-20.00	8039.09	
2	-20.00	-10.00	29428.55	
3	-10.00	0.00	58952.33	
4	0.00	10.00	74159.37	
5	10.00	20.00	43734.56	
6	20.00	30.00	47296.21	
7	30.00	40.00	39621.72	
8	40.00	50.00	24308.85	
9	50.00	60.00	3169.67	

REVISIONS			GROUND MEASURES LLC Earthwork Takeoffs & Bid Checks PHONE: (724) 221-7521		PASDA 2019 QL2 LiDAR DEM (ALLEGHENY COUNTY) AND PROVIDED PDF PLANSET	8/31/2026	STEVE'S EXCAVATING
△	DESCRIPTION	DATE APP.					
			FOR ESTIMATING AND BIDDING PURPOSES ONLY			DATE	RED OAK DEVELOPMENT
							SHEET 2 OF 2